

LED Poster

Reinvent the Shopping Experience



Cablens connection
Available



Foldable design



Seamless
Splicing



Movable



COB technology
Available

► Various applications



Retail / Shopping mall / Restaurant / Airport / Exhibition

Design and Maintenance



Applicable in multiple scenarios




Reduce volume and shipping costs



Easy to install and maintain



High quality display effect

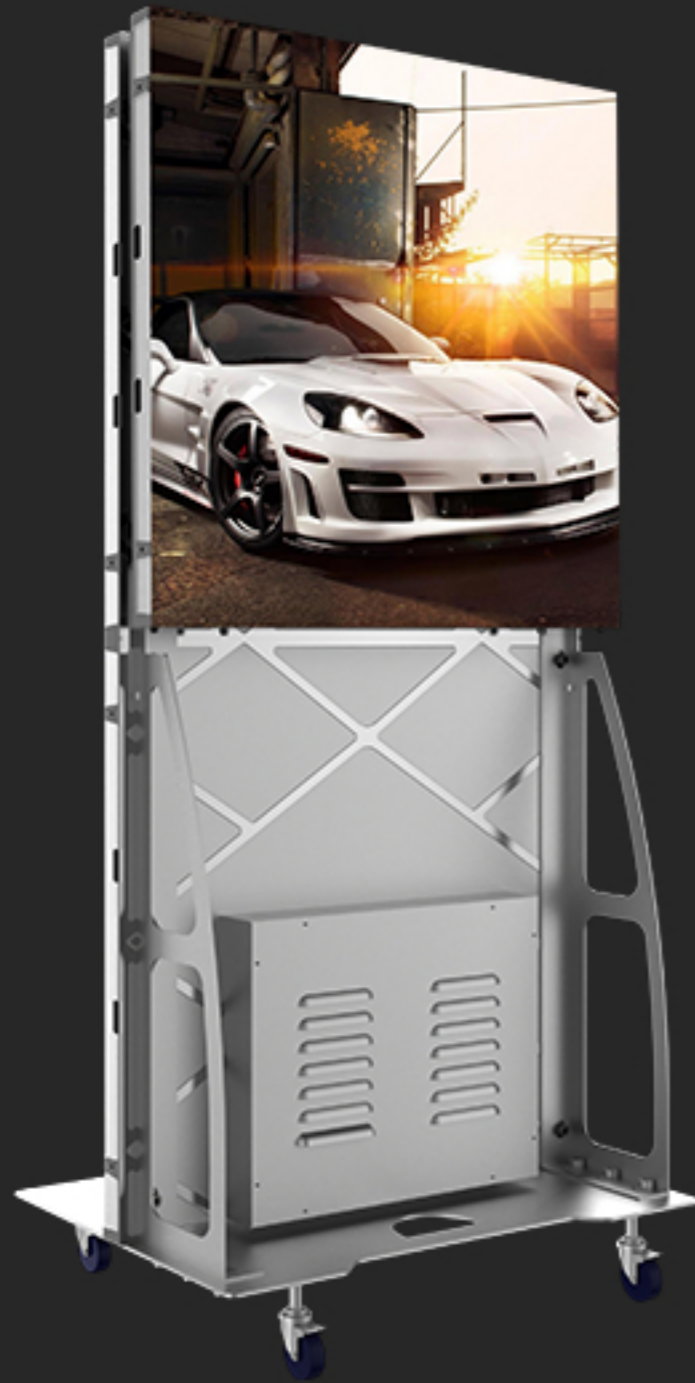

sPoster LED advertising machine uses a simple and efficient display method to meet the display needs of various industries and enhance brand and publicity effects.

► Technical Specifications

Item	Physical Pitch	P1.5mm	P1.8mm	P2.5mm
Mechanical	LED Type	SMD / COB	SMD / COB	SMD2020
	Pixel Density (pixel/m ²)	422,500	284,444	160,000
	Module Dimensions (mm)	W320 x H160	W320× H160	W320× H160
	Module Resolution (pixel)	208 x 104	172 × 86	128 x 64
	Poster Dimensions (W × H) (mm)	640 x 1920	640 x 1920	640 x 1920
	Resolution of Poster (W × H)	416 x 1248	342 x 1032	256 x 768
	Weight Per Poster	45KGS	45KGS	45KGS
	Cabinet Material	Die-casting Aluminum		
	Maintenance way	F / R		
	IP Rating	IP43		
Optical	Brightness (after Cal.)	600~1000nits		
	Refresh Rate	3840HZ		
	Horizontal Viewing Angle	160°		
	Vertical Viewing Angle	160°		
	- Default	6500K±500K		
	Processing	14bit		
	Average Power Consumption	220w/m ²		
	Max Power Consumption	550 w/m ²		
	Operating Temp/Humidity	- 20 ~ 45 °C/ 10% ~ 60%		
	Expected LED Lifetime (Max)	100,000 Hrs		

Shenzhen SoStron Technology Co.,Ltd

Building D, Hongfa Science Park (Yuepeng Road), 2035 Songbai Road, Baoan District, Shenzhen City,China.

Contact us +86 755 2334 3844 info@sostron.com www.sostron.com