

Storm plus


Indoor Fixed Installation LED Display



Economical



Fixed Installation



Good flatness





Ultra Thin and Light

► Various applications



Shopping mall / Hotel / Entertainment / Educational institution / Training

Design and Maintenance

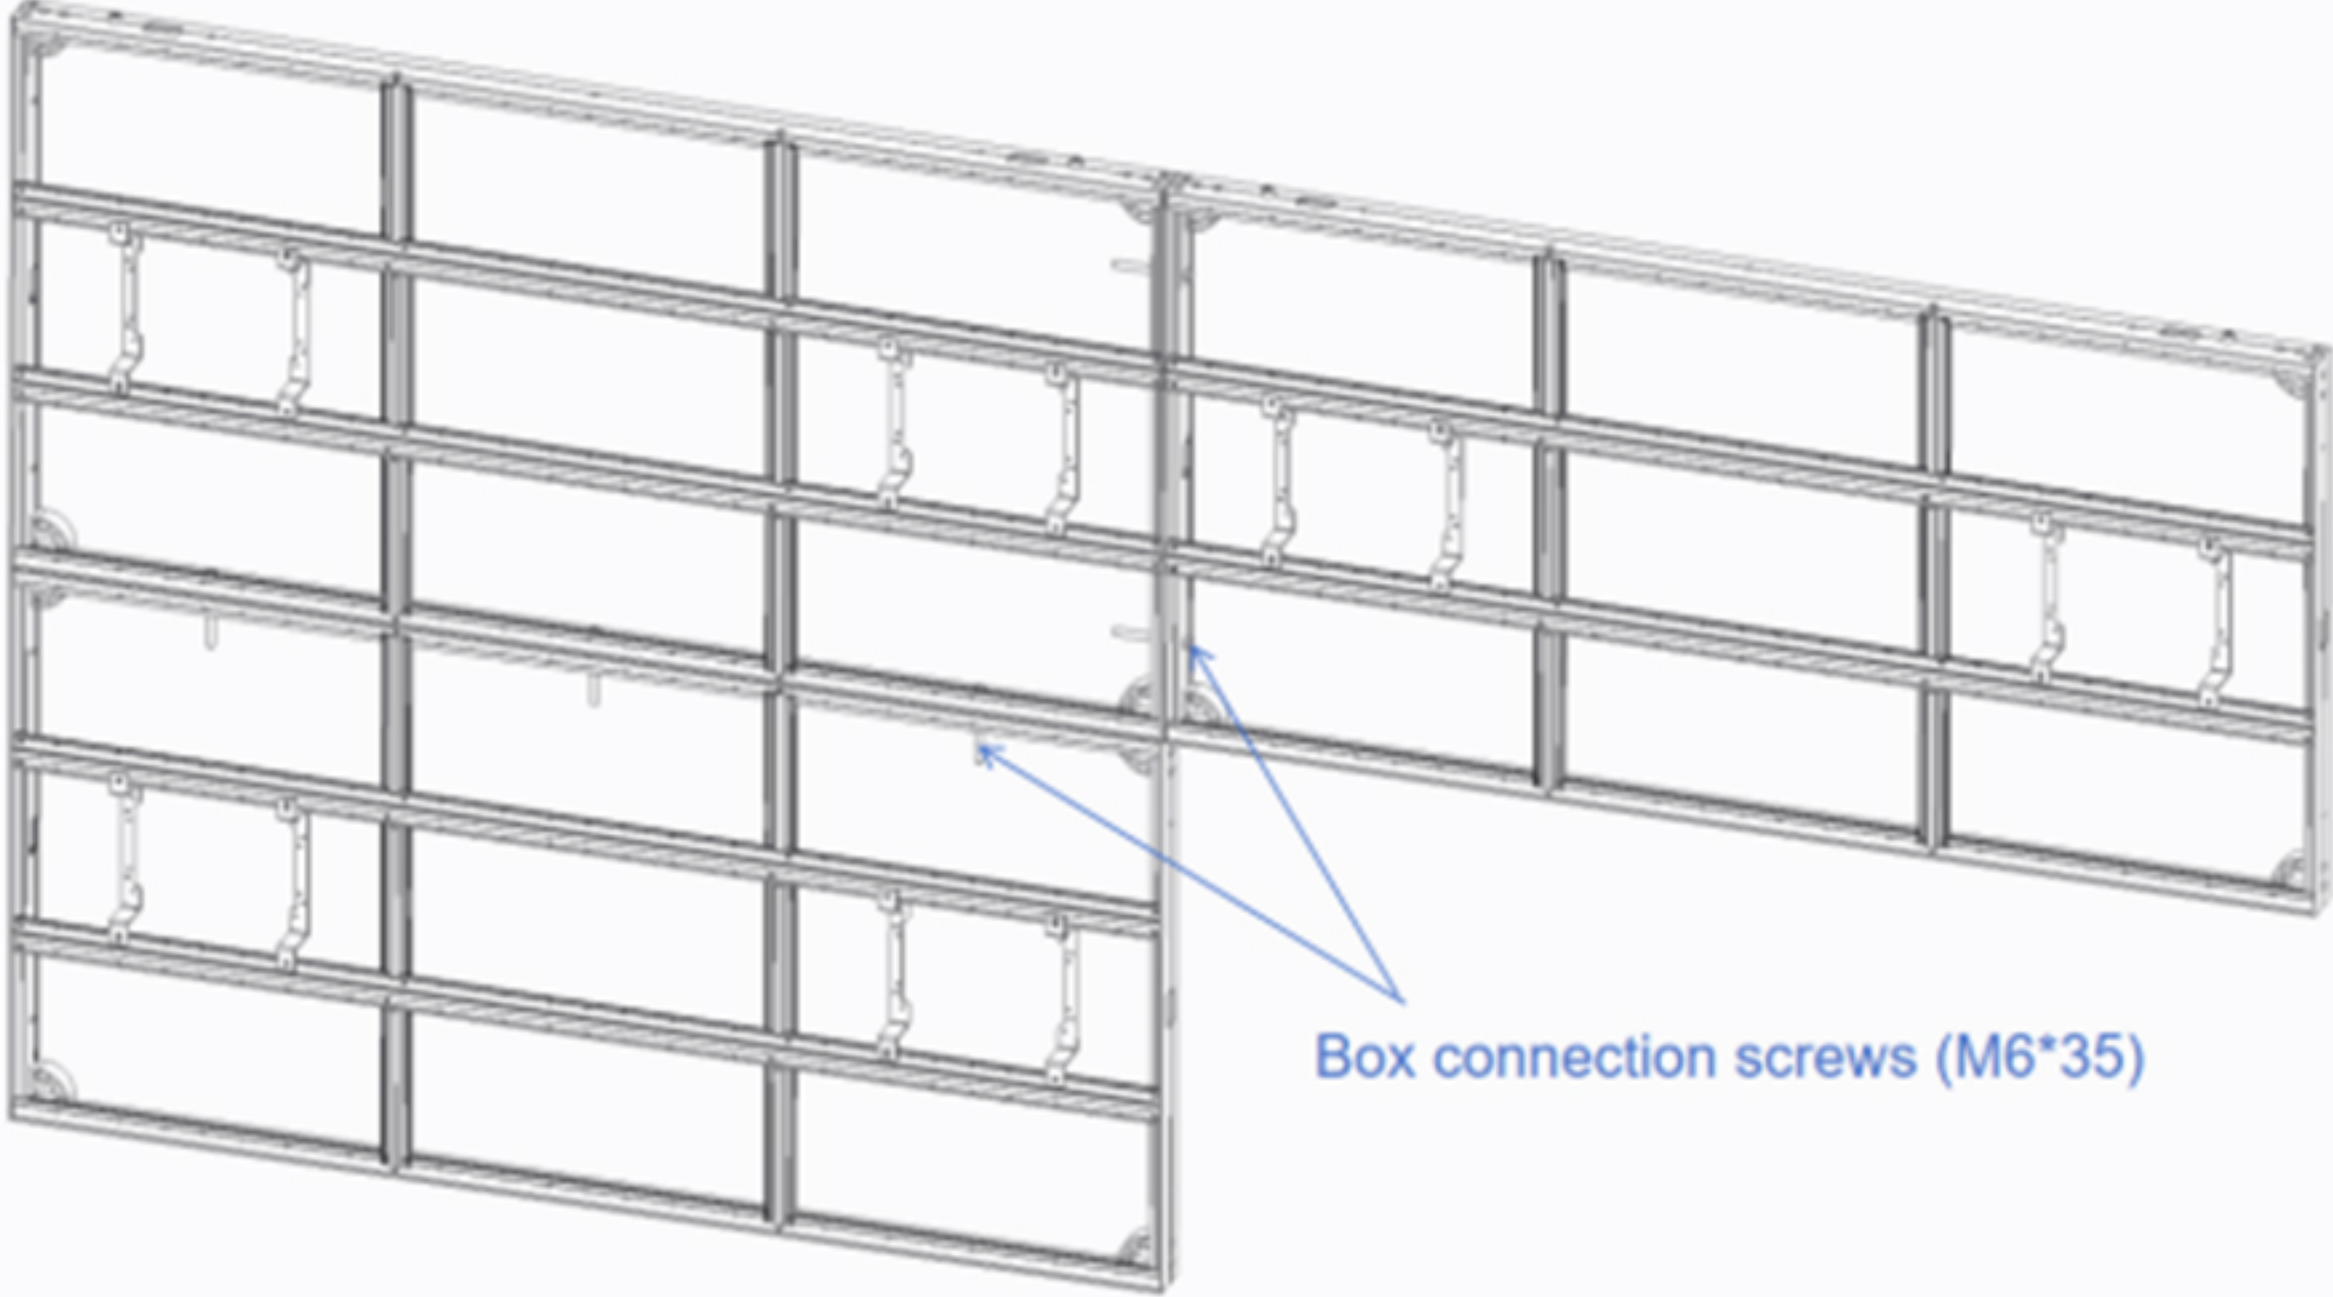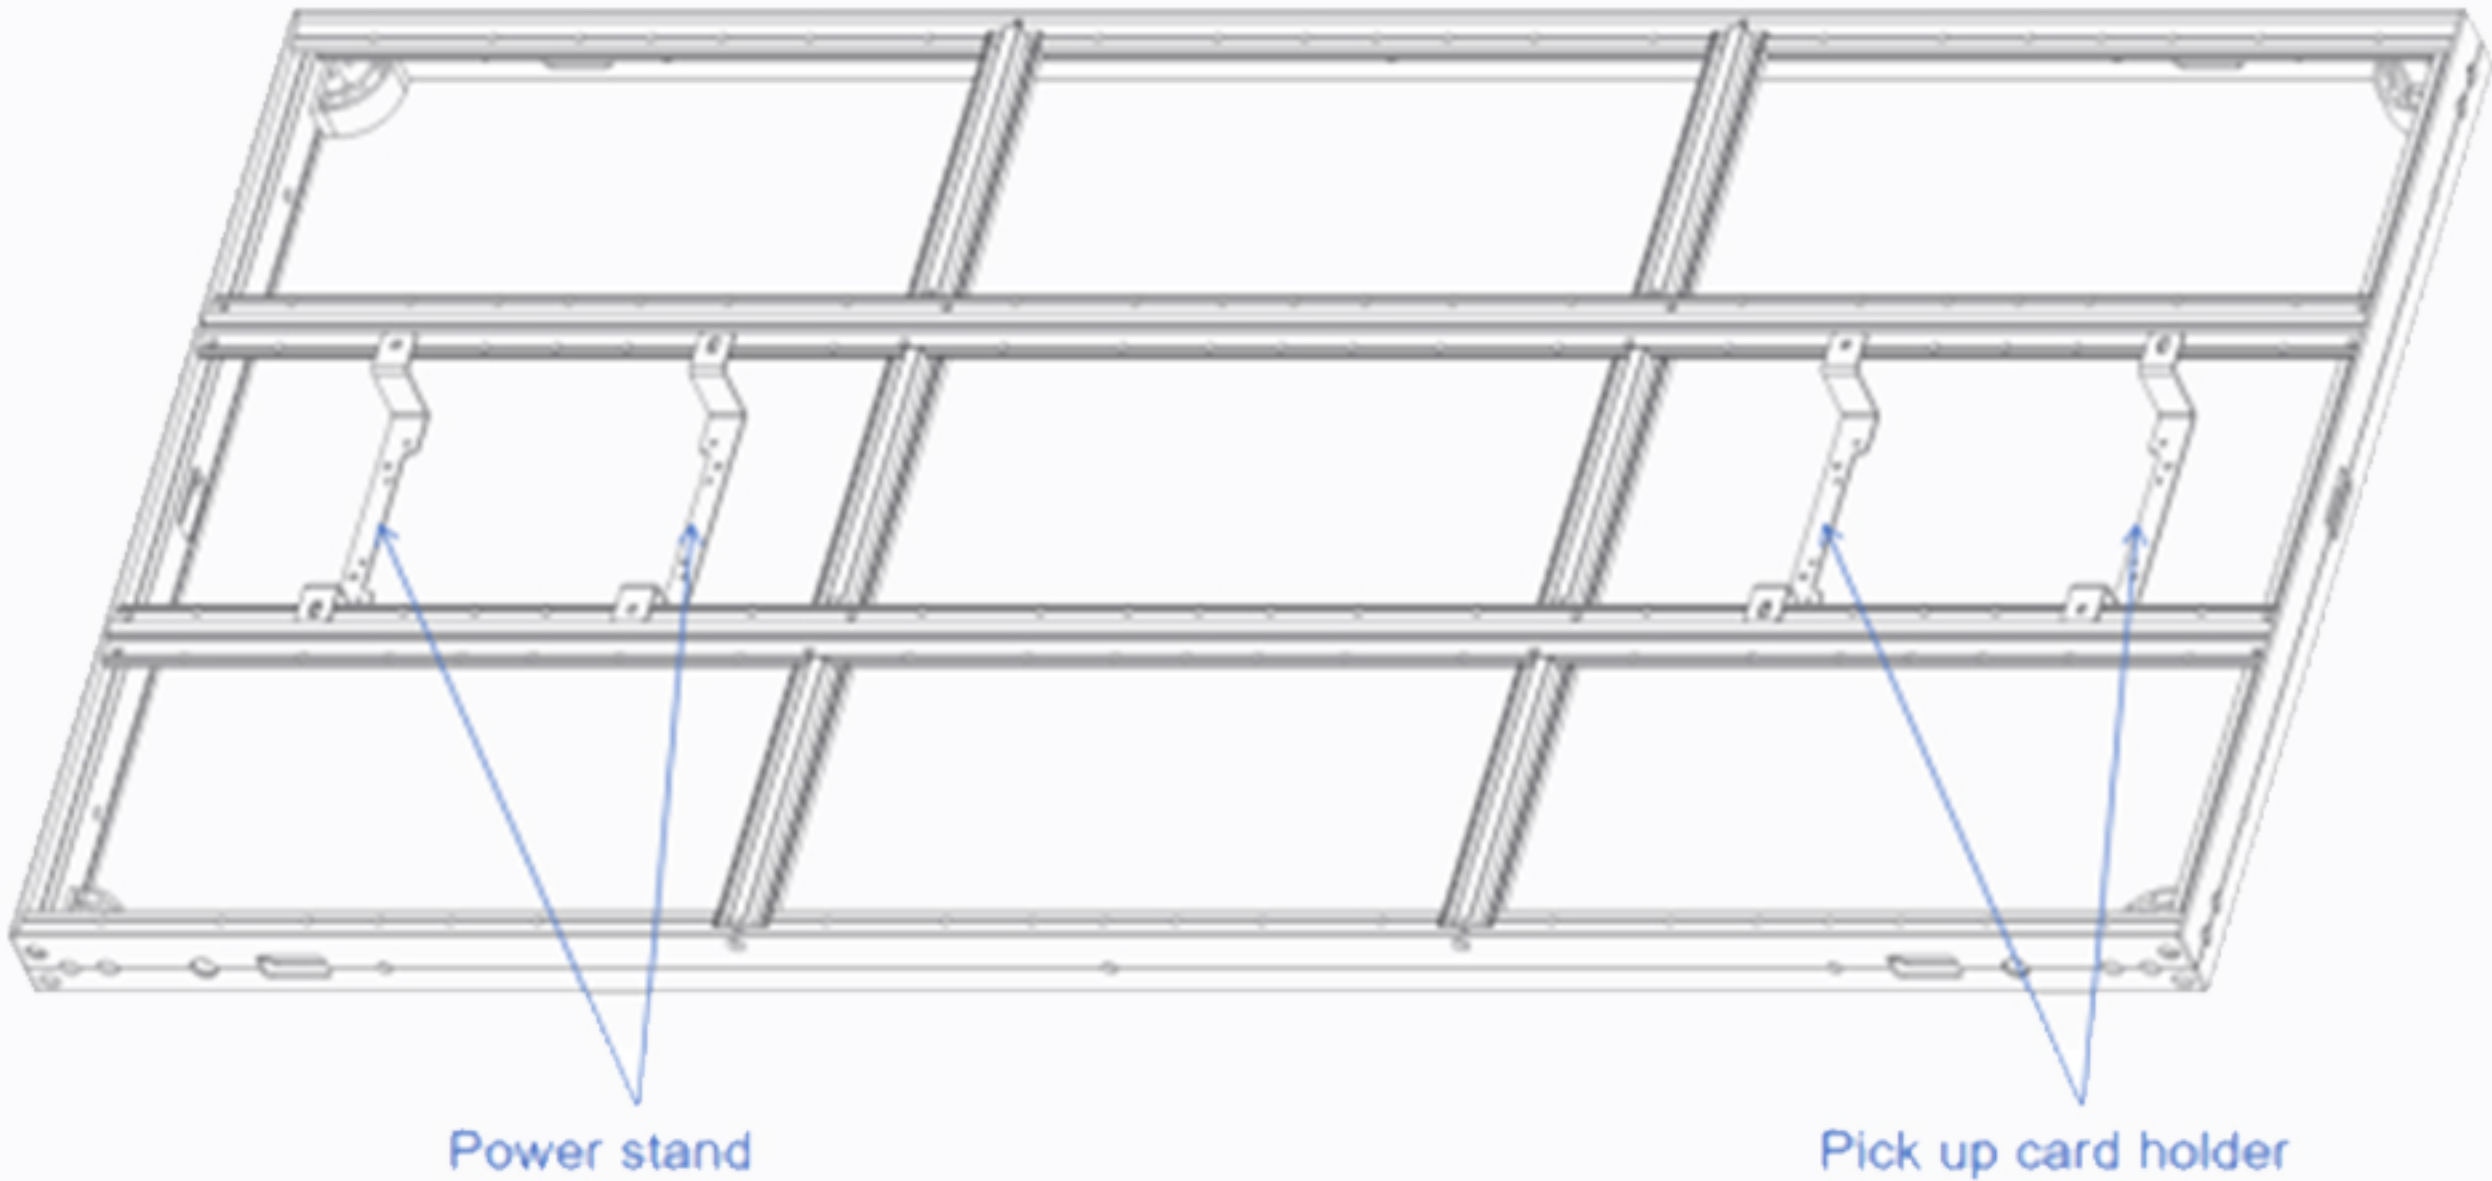


Custom size



Various spacing options

More functions

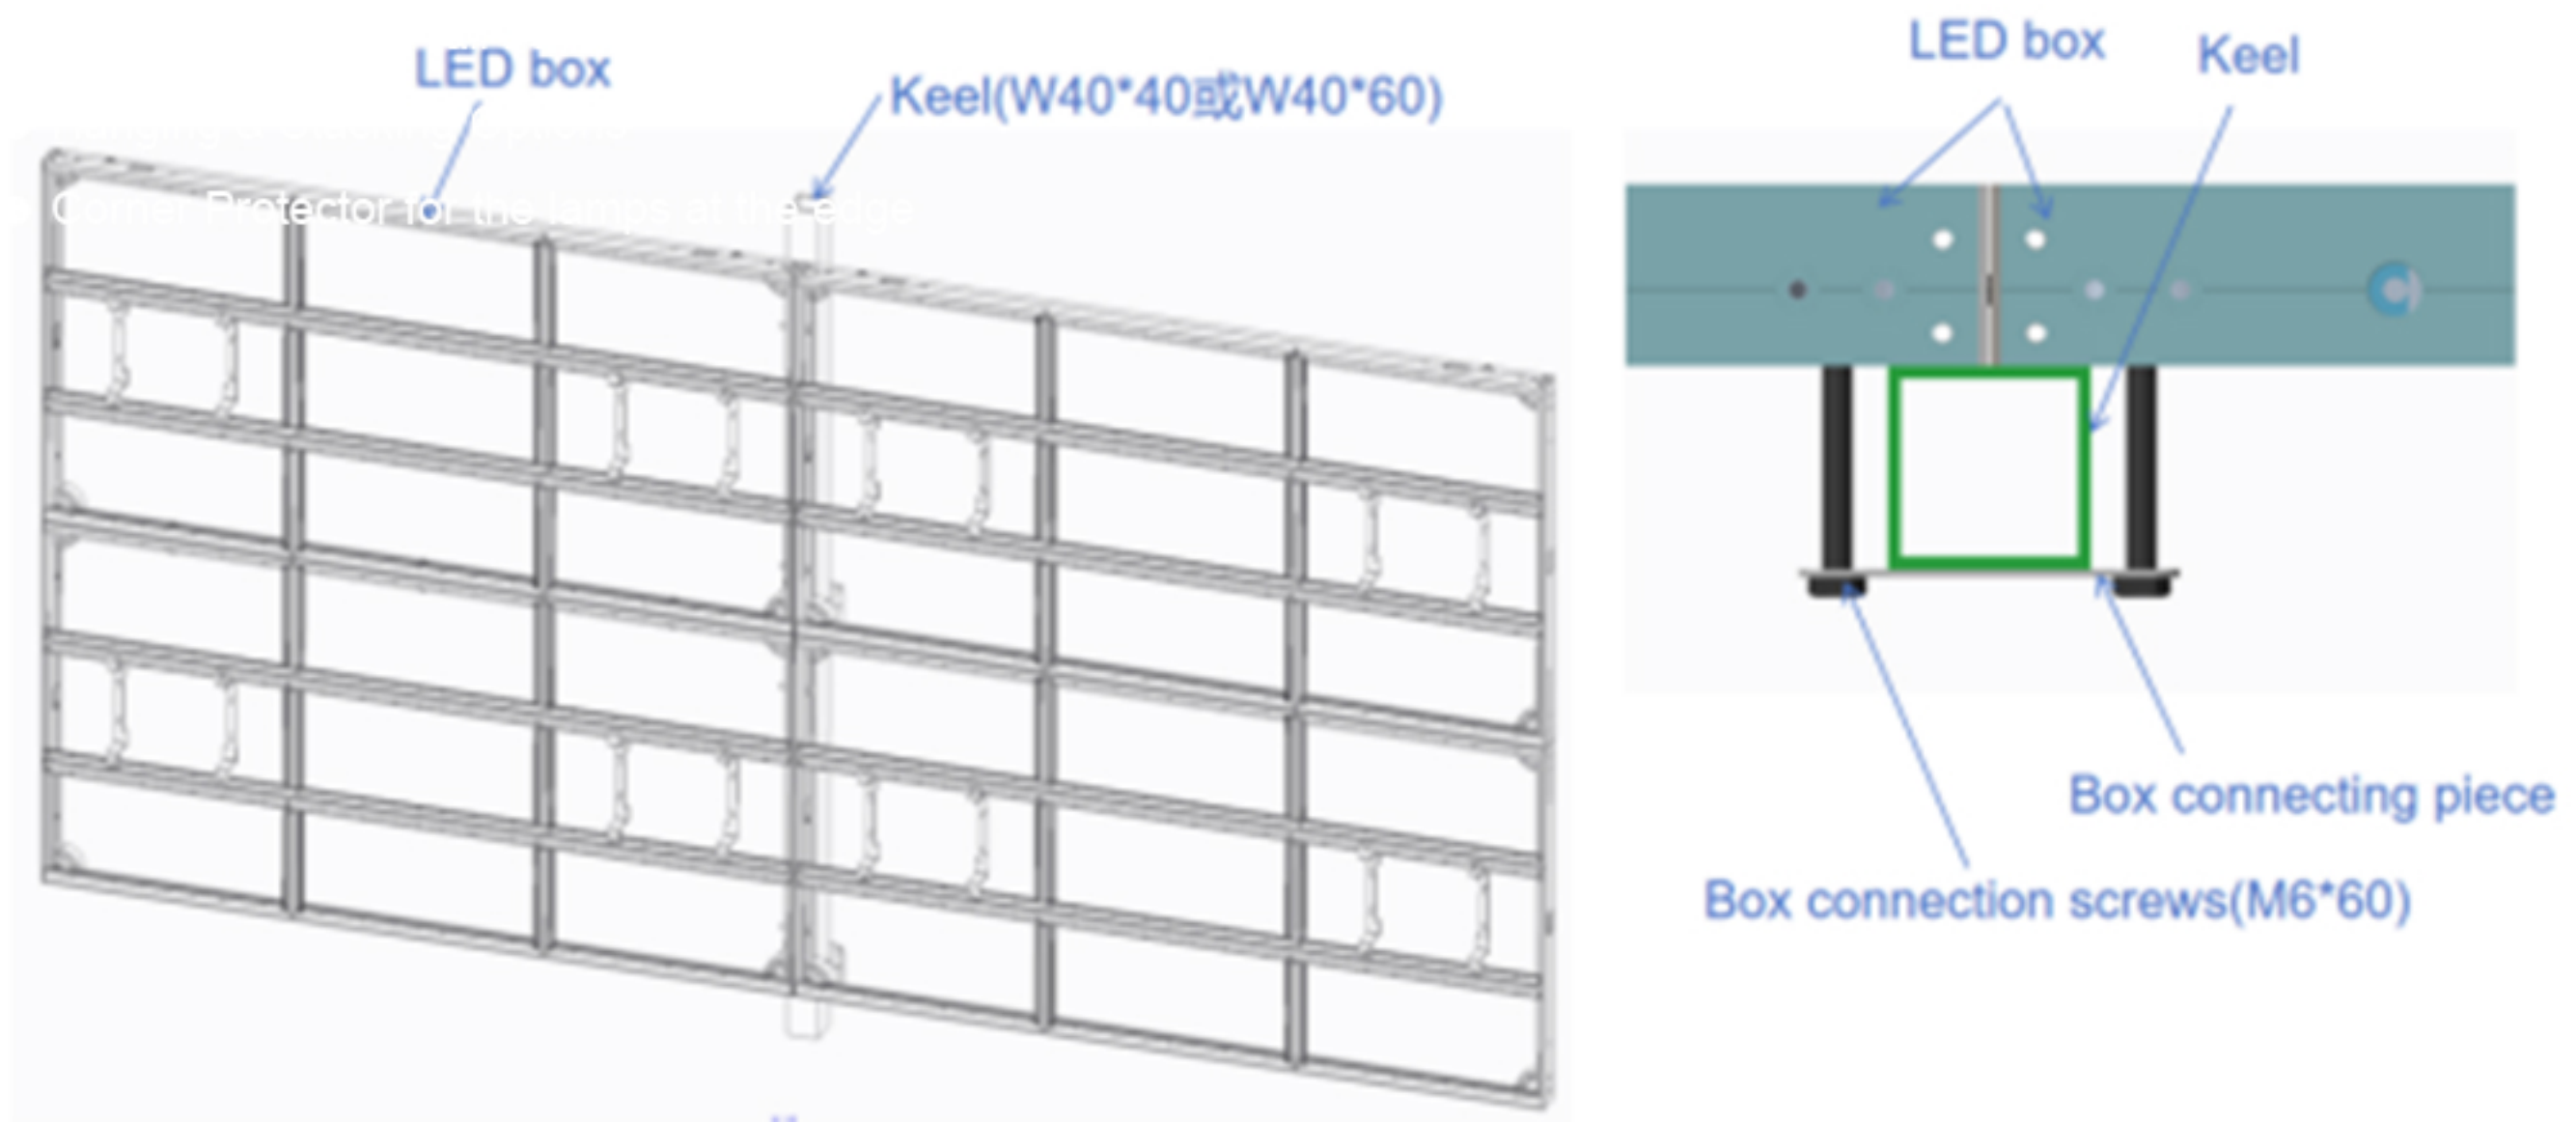

With its 51mm thin and light body and sturdy fixed installation method, it provides an excellent solution for conference rooms and professional display occasions.

► Technical Specifications

Pixel pitch	P1.5mm	P1.8mm	P2.0mm	P2.5mm	P3.0mm	P4.0mm
LED Type	SMD1212	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020
Pixel Density(dot/m2)	427186	289050	250000	160000	111111	62500
Module Size (mm)	320 x 160	320 x 160	320 x 160	320 x 160	320 x 160	320 x 160
Module Resolution (pixels)	208 x 104	172 x 86	160 x 80	128 x 64	104 x 52	80 x 40
Panel Size (mm)	960 x (960/800/640x480) / 640 x (960x800x640x480) / 320 x (960/800/640/480)					
Power Consumption (max./avg.)	150W/SQM / 550W/SQM					
Material	Aluminum					
Panel Weight	20KG / SQM					
Brightness (nits)	600	800	800	1000	1000	1000
Grey Level	14bit					
Input(V)	110-220V, 50-60Hz					
Refresh Frequency	3840Hz					
Operating Temperature	-20°C+60°C					
Ingress Protection	IP21					
Certification	ETL/FCC/CE/CCC					

Shenzhen SoStron Technology Co.,Ltd

Building D, Hongfa Science Park (Yuepeng Road), 2035 Songbai Road, Baoan District, Shenzhen City,China.

Contact us +86 755 2334 3844 info@sostron.com www.sostron.com